


FEATURES

- High Voltage Operation : $V_{DS}=50V$
- High Power : 48.8dBm (typ.) @ P_{sat}
- High Efficiency : 70% (typ.) @ P_{sat}
- Power Gain : 18dB (typ.) @ $f=2.6GHz$
- Proven Reliability

DESCRIPTION

SEI's GaN-HEMT offers high efficiency, ease of matching, greater consistency and broad bandwidth for high power amplifiers with 50V operation, and gives you higher gain.

This new product is ideally suited for use in 2.6GHz WiMAX design requirements as it offers high gain, long term reliability and ease of use.

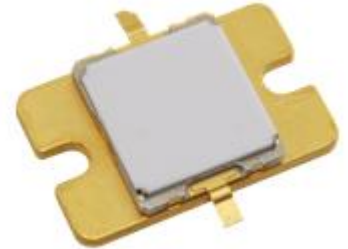

ABSOLUTE MAXIMUM RATINGS (Case Temperature $T_c=25deg.C$)

Item	Symbol	Condition	Rating	Unit
Operating Voltage	V_{DS}		55	V
Drain-Source Voltage	V_{DS}	$V_{GS}=-8V$	160	V
Gate-Source Voltage	V_{GS}		-15	V
Total Power Dissipation	P_t		75	W
Storage Temperature	T_{stg}		-65 to +175	deg.C
Channel Temperature	T_{ch}		250	deg.C

RECOMMENDED OPERATING CONDITION

Item	Symbol	Condition	Limit	Unit
DC Input Voltage	V_{DS}		≤ 50	V
Forward Gate Current	I_{GF}	$R_G=5ohm$	≤ 76	mA
Reverse Gate Current	I_{GR}	$R_G=5ohm$	≥ -2.6	mA
Channel Temperature	T_{ch}		≤ 180	deg.C
Average Output Power	P_{ave}		≤ 45.8	dBm

ELECTRICAL CHARACTERISTICS (Case Temperature $T_c=25deg.C$)

Item	Symbol	Condition	Limit			Unit
			Min.	Typ.	Max.	
Pinch-Off Voltage	V_p	$V_{DS}=50V, I_{DS}=18mA$	-1.0	-1.5	-2.0	V
Saturated Power	$P_{sat} *1$	$V_{DS}=50V$	48.0	48.8	-	dBm
Drain Efficiency	$\eta_d *2$	$I_{DS}(DC)=300mA$	30.0	35.0	-	%
Power Gain	$G_p *2$	$f=2.6GHz$	17.0	18.0	-	dB
Thermal Resistance	R_{th}	Channel to Case at 48W PDC	-	2.5	3.0	deg.C/W


*1 : 10%-duty RF pulse (DC supply constant)

*2 : $P_{out}=40.8dBm$, CW modulation Signal (W-CDMA or WiMAX)


RoHS COMPLIANCE	Yes
-----------------	-----

RF characteristics @f=2.6GHz fine tuned

Output Power vs. Frequency
VDS=50V, IDS(DC)=300mA

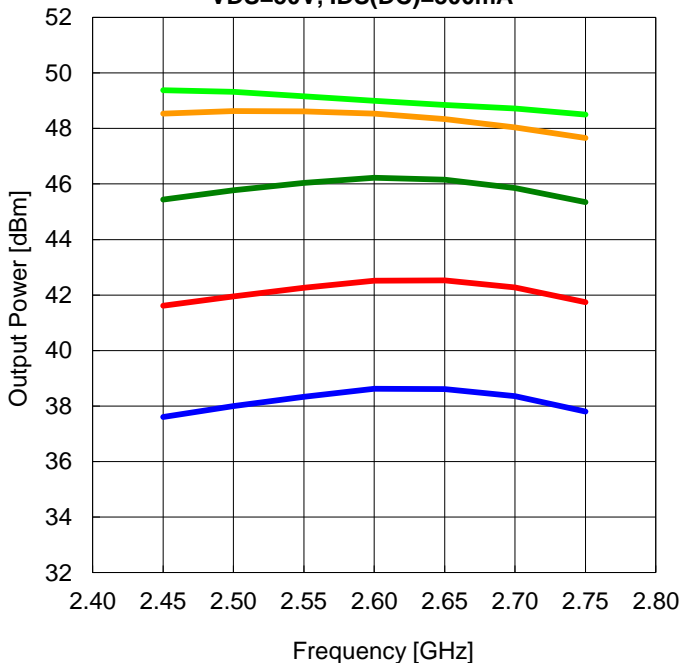

Output Power and Drain Efficiency vs. Input Power
VDS=50V, IDS(DC)=300mA, f=2.6GHz

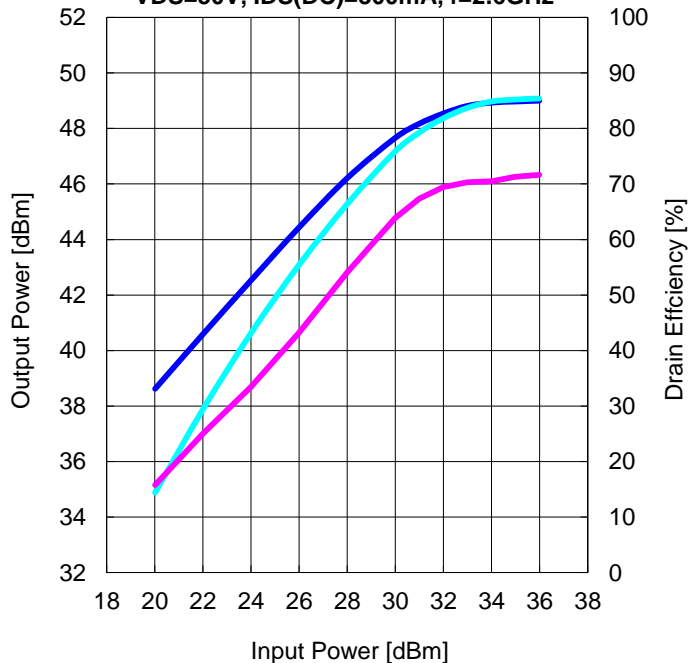


— Pin=20dBm — Pin=24dBm — Pin=28dBm
— Pin=32dBm — Pin=36dBm

— Pout (class AB) — Pout (class B) — Nd (class B)

Test Fixture


Pulse Signal (10%-duty, DC : constant)

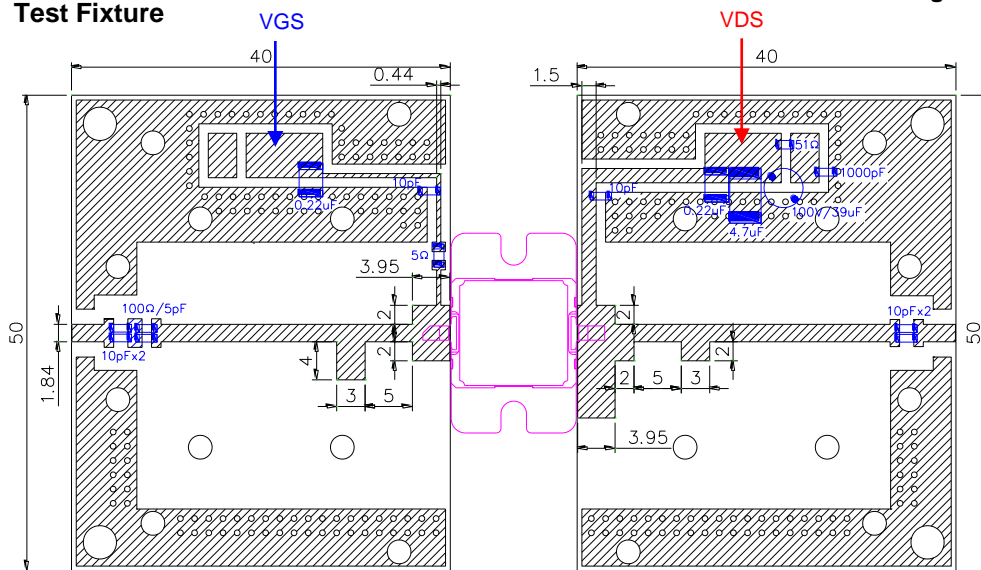


h=0.8mm εr=3.5
Cu=18um Unit:mm


- Reference DATA -

S-Parameters @VDS=50V, IDS(DC)=300mA, f=0.5 to 4.5GHz
 ZI = Zs = 50ohm Marker : 2.6GHz

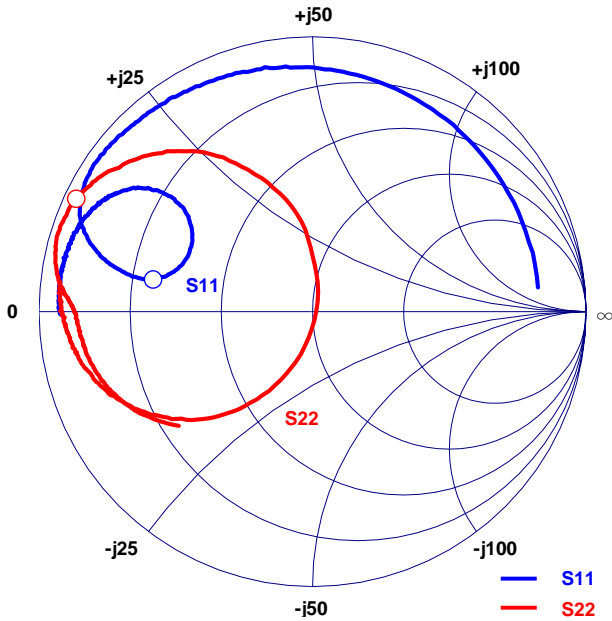


Freq. GHz	S11			S21		S12		S22	
	MAG	ANG		MAG	ANG	MAG	ANG	MAG	ANG
0.50	0.92	-179.38	7.27	38.59	0.005	-21.40	0.64	-139.61	
0.60	0.93	177.50	5.78	29.90	0.004	-25.21	0.69	-145.37	
0.70	0.93	175.00	4.78	22.21	0.004	-23.88	0.74	-150.32	
0.80	0.93	172.67	4.06	15.44	0.004	-22.95	0.77	-154.74	
0.90	0.93	170.46	3.56	9.10	0.003	-20.95	0.79	-158.51	
1.00	0.93	167.90	3.18	2.67	0.003	-15.87	0.81	-161.91	
1.10	0.92	165.65	2.91	-3.29	0.003	-15.06	0.82	-164.74	
1.20	0.92	163.38	2.73	-9.04	0.003	-6.10	0.83	-167.52	
1.30	0.91	160.65	2.62	-14.79	0.003	2.05	0.84	-170.08	
1.40	0.90	158.57	2.57	-20.45	0.004	1.09	0.85	-172.06	
1.50	0.89	155.88	2.56	-26.84	0.005	1.15	0.85	-174.01	
1.60	0.88	153.15	2.62	-33.51	0.005	0.18	0.86	-175.85	
1.70	0.86	150.62	2.72	-40.92	0.006	-2.89	0.86	-177.77	
1.80	0.82	147.54	2.87	-49.37	0.007	-2.79	0.86	-179.35	
1.90	0.78	144.67	3.10	-58.92	0.009	-10.48	0.87	179.12	
2.00	0.72	142.18	3.38	-70.02	0.010	-17.99	0.89	177.89	
2.10	0.65	140.90	3.68	-82.84	0.012	-29.34	0.91	176.09	
2.20	0.57	142.67	3.98	-97.53	0.013	-42.71	0.93	173.85	
2.30	0.51	149.15	4.21	-113.59	0.015	-56.28	0.95	170.55	
2.40	0.50	158.05	4.35	-130.07	0.016	-72.67	0.97	166.25	
2.50	0.54	165.22	4.39	-146.41	0.018	-88.20	0.97	161.07	
2.60	0.59	168.66	4.41	-162.28	0.019	-104.90	0.96	154.57	
2.70	0.65	168.97	4.43	-178.17	0.020	-119.25	0.92	147.43	
2.80	0.71	168.19	4.51	166.04	0.021	-135.88	0.85	138.84	
2.90	0.76	166.92	4.67	148.97	0.023	-153.30	0.73	127.32	
3.00	0.82	164.65	4.79	128.76	0.025	-173.84	0.54	113.08	
3.10	0.88	161.29	4.74	105.81	0.026	163.66	0.26	93.37	
3.20	0.93	156.53	4.37	81.44	0.026	141.73	0.06	-93.08	
3.30	0.96	150.12	3.68	59.15	0.022	120.70	0.35	-120.99	
3.40	0.96	144.39	2.97	40.92	0.020	103.89	0.56	-135.95	
3.50	0.95	138.78	2.40	26.63	0.017	91.93	0.69	-146.76	
3.60	0.94	133.18	1.98	14.73	0.015	83.65	0.77	-154.74	
3.70	0.94	127.30	1.68	4.55	0.015	77.27	0.82	-160.84	
3.80	0.93	120.42	1.48	-4.96	0.014	71.79	0.85	-165.88	
3.90	0.92	112.32	1.32	-14.08	0.013	64.06	0.87	-170.19	
4.00	0.90	103.04	1.22	-22.60	0.013	56.19	0.89	-173.54	
4.10	0.89	91.30	1.16	-32.34	0.014	47.09	0.91	-176.48	
4.20	0.87	76.21	1.11	-43.21	0.013	38.73	0.92	-179.22	
4.30	0.85	57.16	1.10	-55.40	0.014	26.65	0.92	178.45	
4.40	0.84	33.80	1.05	-69.39	0.013	10.73	0.93	175.78	
4.50	0.83	6.07	1.00	-85.26	0.013	-0.35	0.93	173.43	

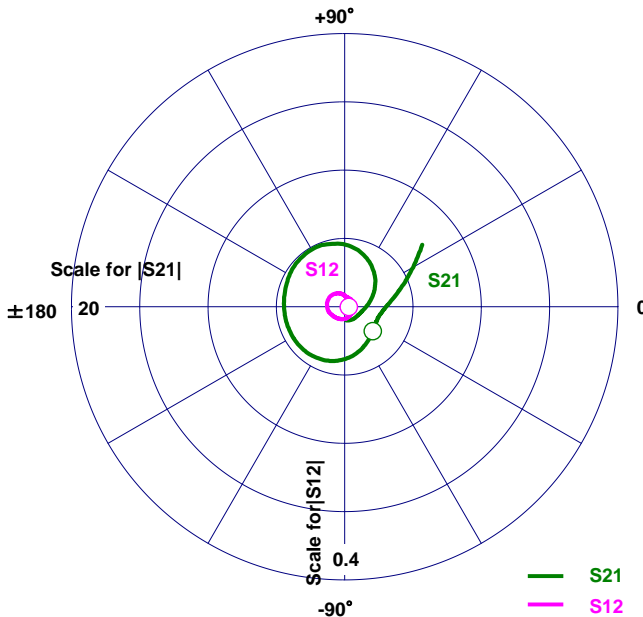

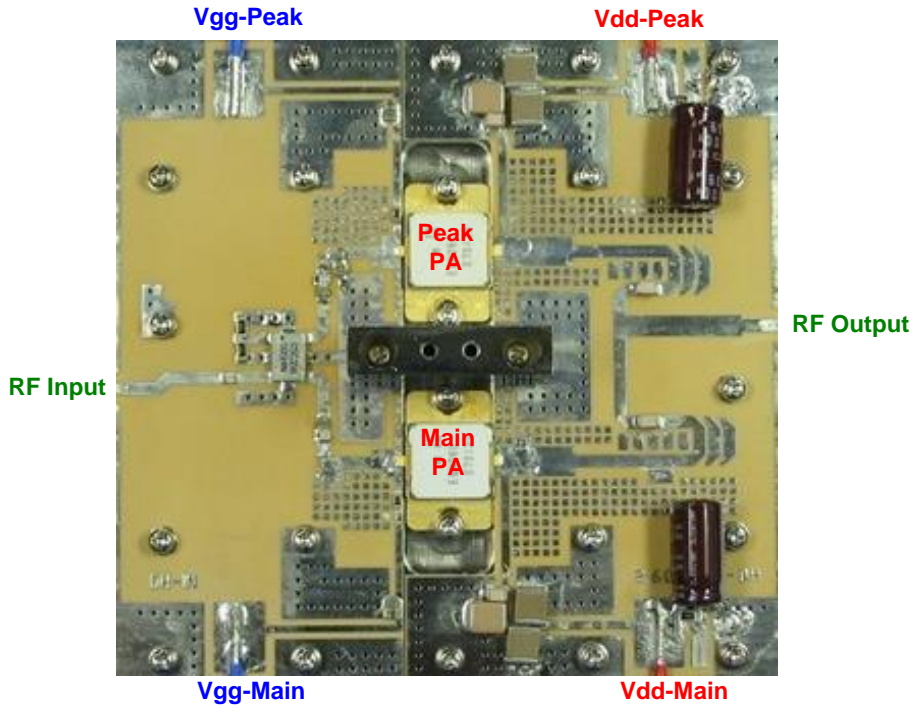



Test Fixture

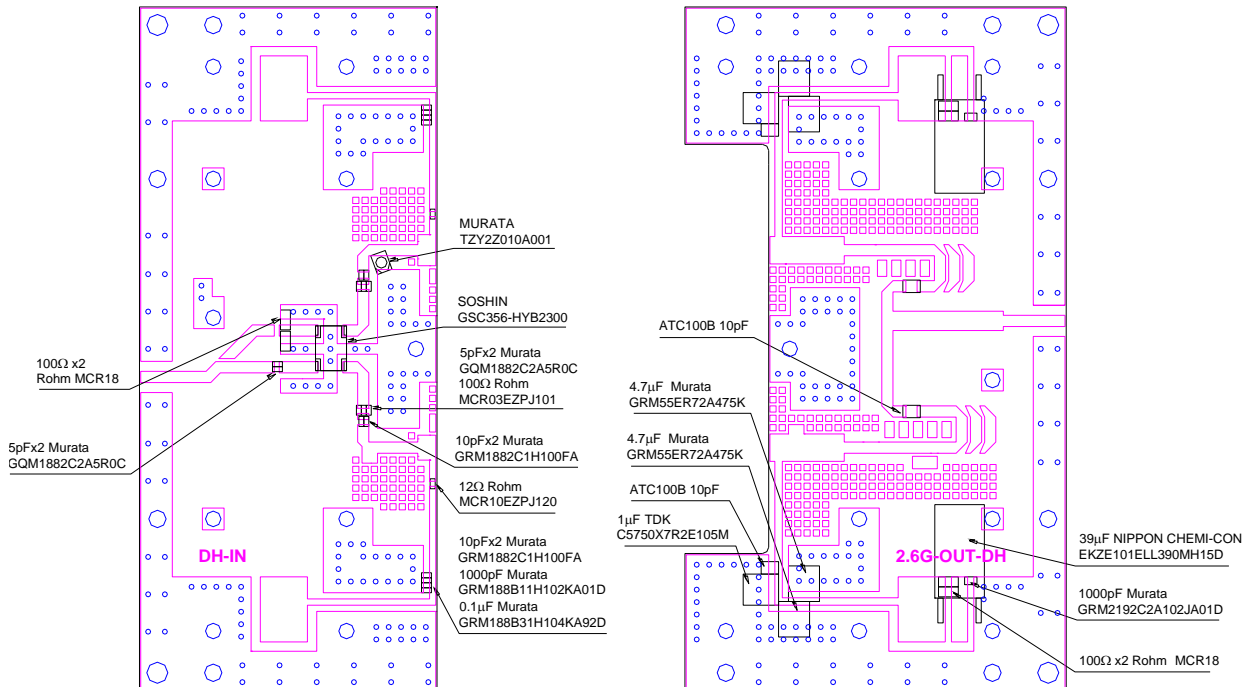

CS3376C, t=0.8mm, Er=3.5



Doherty Amplifier characteristics

Test conditions : $V_{ds}=50V$, $I_{ds-main}=200mA$, $V_{gs-peak}=-3.5V$, Pulse Duty : 10% (6us/60us)

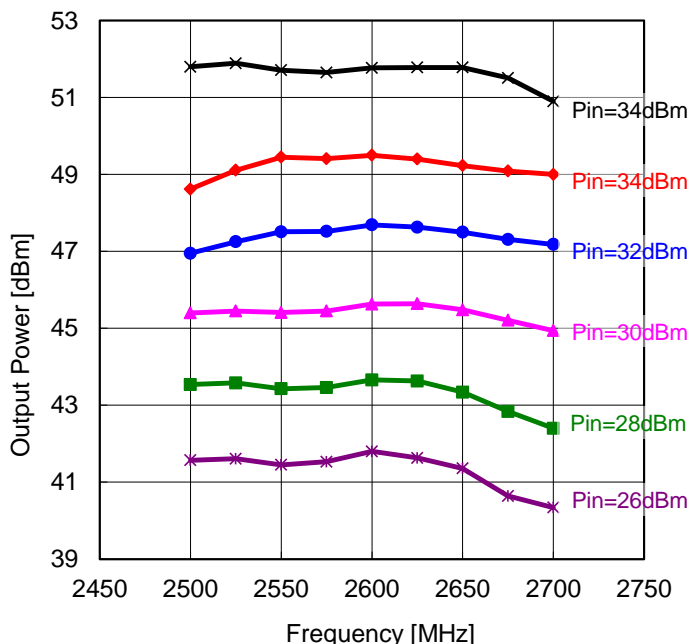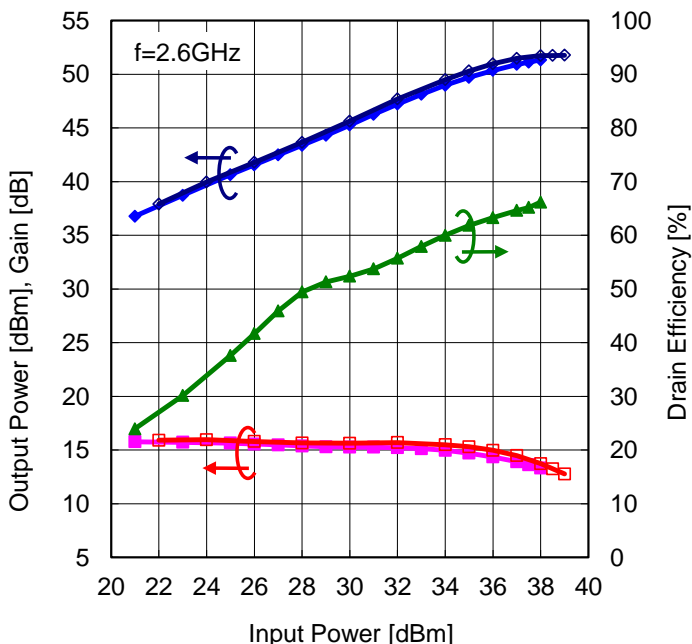


Test conditions : $V_{ds}=50V$, $I_{ds-main}=200mA$, $V_{gs-peak}=-3.5V$

W-CDMA 2-carrier, 5MHz Spacing, PAR=7.8dB(0.01%), $f_1=2587.5MHz$, $f_2=2602.5MHz$

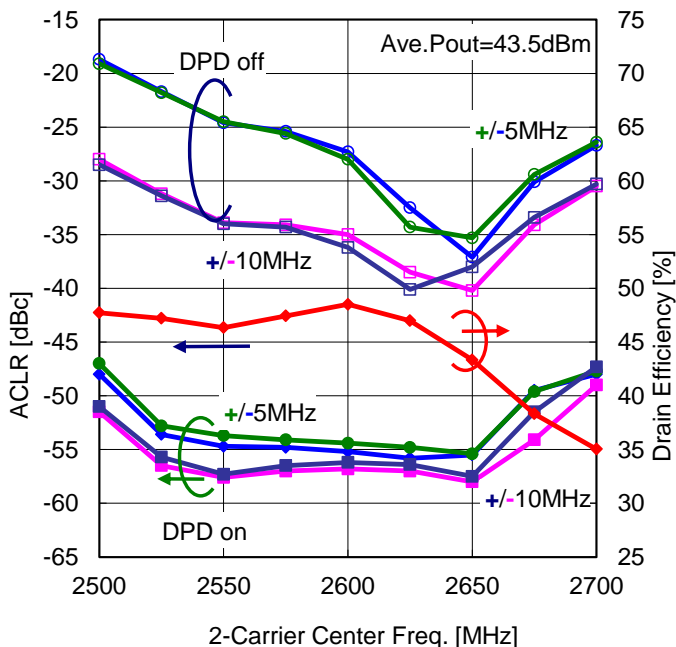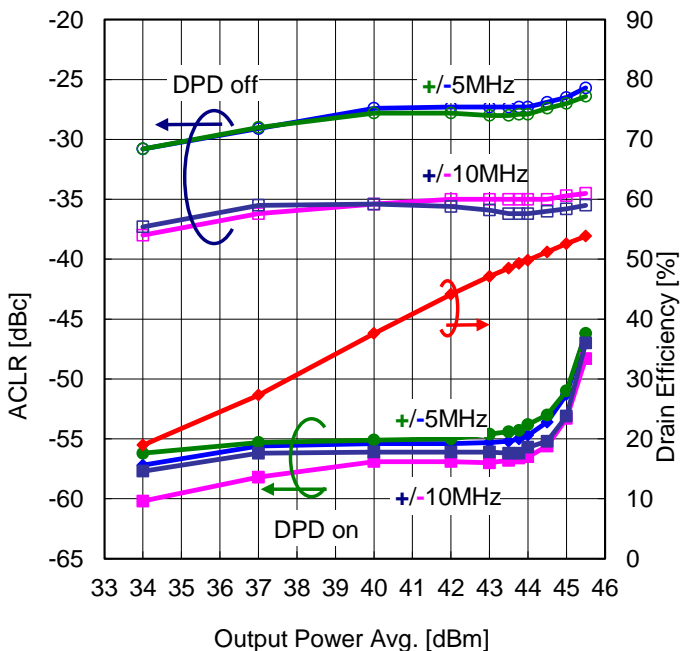

**MTTF Calculation
- Estimated MTTF -**

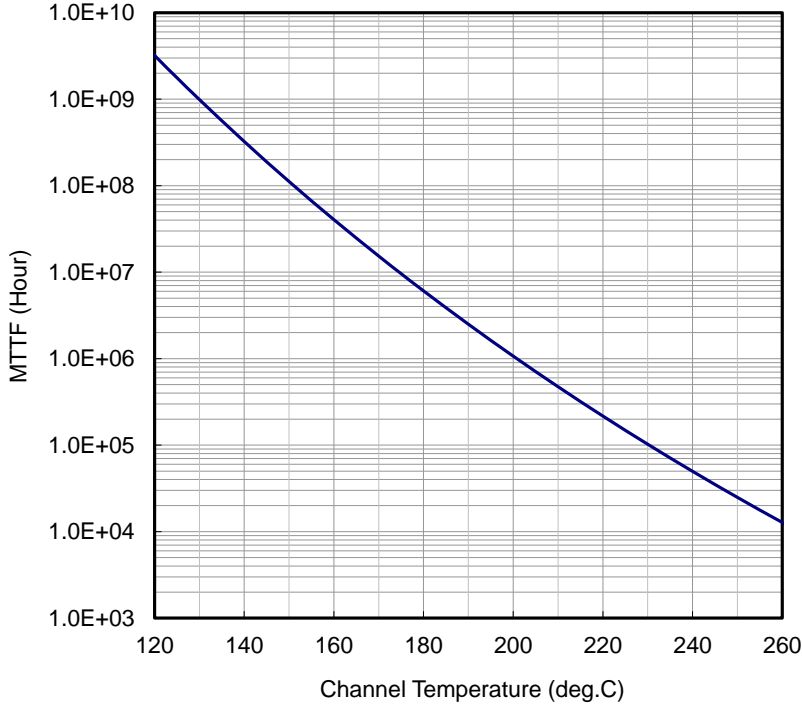

**Ea=1.6eV
Confidence Level=90%**

Channel Temp. (deg.C)	MTTF (Hours)
160	4.05 x 10 ⁷
180	6.07 x 10 ⁶
200	1.07 x 10 ⁶

$$AF = \exp\left[\frac{-Ea}{k}\left(\frac{1}{T_{stress}} - \frac{1}{T_{use}}\right)\right]$$

$$MTTF_{use} = MTTF_{stress} \times AF$$

Where;

AF : acceleration factor

Ea : activation energy (1.6eV)

k : Boltzmann's constant (8.62x10⁻⁵eV/K)

T_{stress} : stress temperature (K)

T_{use} : use temperature (K)

ESD characteristic

Test Methodology	Class
Human Body Model (per JESD22-A114)	1A
Machine Model (per JEIA/ESD22-A115)	A



EGN26C070I2D

High Voltage - High Power GaN-HEMT

For further information please contact:

<http://global-sei.com/Electro-optic/about/office.html>