


FEATURES

- High Output Power: $P_{1dB} = 36.5\text{dBm}$ (Typ.)
- High Gain: $G_{1dB} = 9.5\text{dB}$ (Typ.)
- High PAE: $\eta_{add} = 36\%$ (Typ.)
- Low IM3 = $-46\text{dBc}@P_o = 25.5\text{dBm}$
- Broad Band: 6.4 to 7.2GHz
- Impedance Matched $Z_{in}/Z_{out} = 50\text{ohm}$
- Hermetically Sealed Package

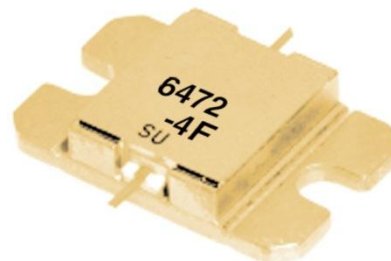

DESCRIPTION

The FLM6472-4F is a power GaAs FET that is internally matched for standard communication bands to provide optimum power and gain in a 50 ohm system.

SEDI's stringent Quality Assurance Program assures the highest reliability and consistent performance.

ABSOLUTE MAXIMUM RATING (Case Temperature $T_c=25\text{deg.C}$)

Item	Symbol	Condition	Rating	Unit
Drain-Source Voltage	V_{DS}		15	V
Gate-Source Voltage	V_{GS}		-5	V
Total Power Dissipation	P_T	$T_c = 25\text{deg.C}$	25	W
Storage Temperature	T_{stg}		-65 to +175	deg.C
Channel Temperature	T_{ch}		175	deg.C

SEDI recommends the following conditions for the reliable operation of GaAs FETs:

1. The drain-source operating voltage (V_{DS}) should not exceed 10 volts.
2. The forward and reverse gate currents should not exceed 16.0 and -2.2 mA respectively with gate resistance of 100ohm.

ELECTRICAL CHARACTERISTICS (Case Temperature $T_c=25\text{deg.C}$)


Item	Symbol	Test Conditions	Limit			Unit
			Min.	Typ.	Max.	
Saturated Drain Current	I_{DSS}	$V_{DS}=5V, V_{GS}=0V$	-	1700	2600	mA
Transconductance	g_m	$V_{DS}=5V, I_{DS}=1100\text{mA}$	-	1700	-	mS
Pinch-off Voltage	V_p	$V_{DS}=5V, I_{DS}=85\text{mA}$	-0.5	-1.5	-3.0	V
Gate Source Breakdown Voltage	V_{GSO}	$I_{GS}=-85\text{uA}$	-5.0	-	-	V
Output Power at 1dB G.C.P.	P_{1dB}	$V_{DS}=10V,$ $I_{DS}=0.65 I_{DSS}$ (Typ.), $f=6.4$ to 7.2 GHz, $Z_S=Z_L=50\text{ohm}$	35.5	36.5	-	dBm
Power Gain at 1dB G.C.P.	G_{1dB}		8.5	9.5	-	dB
Drain Current	I_{dsr}		-	1100	1300	mA
Power-added Efficiency	η_{add}		-	36	-	%
Gain Flatness	ΔG		-	-	1.2	dB
3rd Order Intermodulation Distortion	IM_3	$f = 7.2$ GHz, $\Delta f = 10$ MHz 2-Tone Test $P_{out} = 25.5\text{dBm}$ S.C.L.	-44	-46	-	dBc
Thermal Resistance	R_{th}	Channel to Case	-	5.0	6.0	deg.C/W
Channel Temperature Rise	ΔT_{ch}	$10V \times I_{dsr} \times R_{th}$	-	-	80	deg.C

G.C.P.: Gain Compression Point, S.C.L.: Single Carrier Level


CASE STYLE	IB	
ESD	Class 3A	4000V to 8000V
RoHS Compliance	Yes	

Note : Based on JEDEC JESD22-A114 (C=100pF, R=1.5kohm)


POWER DERATING CURVE

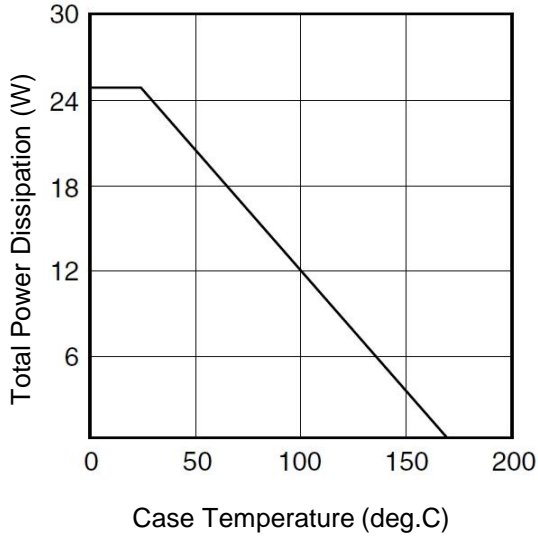


OUTPUT POWER & IM₃ vs. INPUT POWER

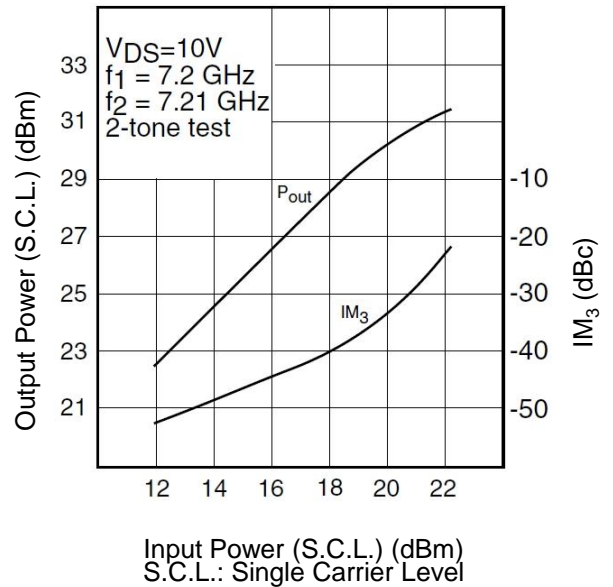


OUTPUT POWER vs. FREQUENCY

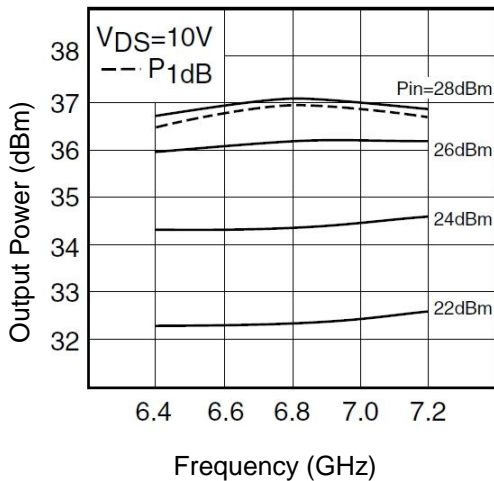


OUTPUT POWER vs. INPUT POWER

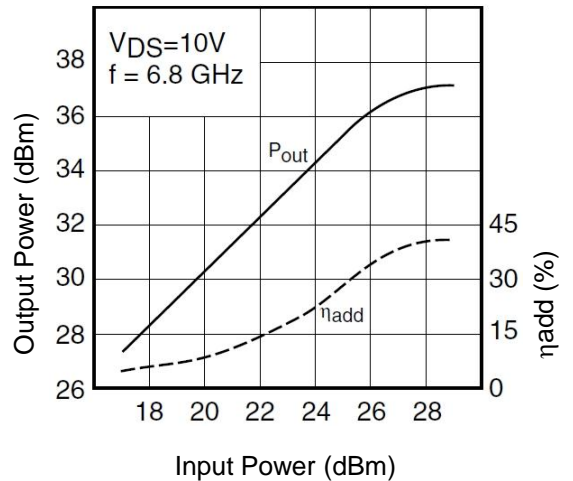

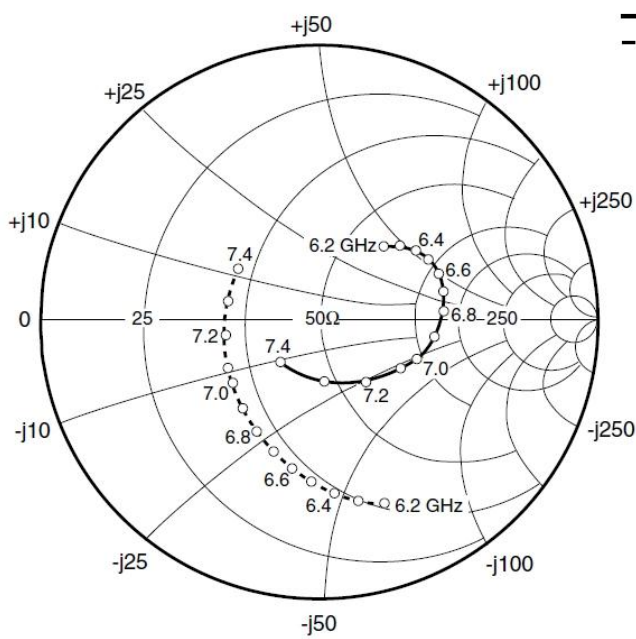

—○— S₁₁
- -○- - S₂₂

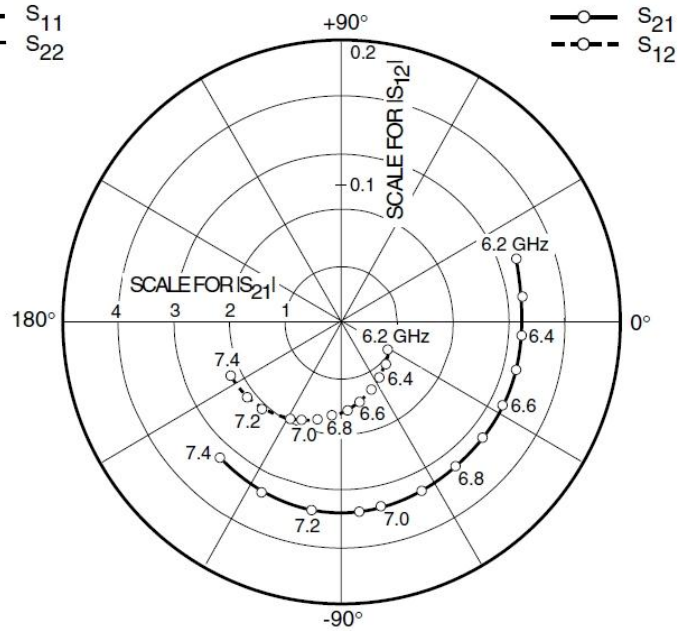


—○— S₂₁
- -○- - S₁₂

S-PARAMETERS

$V_{DS} = 10V, I_{DS} = 1100mA$

FREQUENCY (MHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
6200	0.355	48.9	3.308	19.2	0.040	-30.6	0.704	-70.9
6300	0.396	43.1	3.273	7.5	0.044	-43.2	0.665	-78.3
6400	0.428	36.4	3.256	-4.3	0.048	-55.5	0.627	-85.6
6500	0.449	29.2	3.239	-15.8	0.053	-65.7	0.586	-93.3
6600	0.460	21.2	3.246	-27.5	0.058	-75.9	0.548	-101.1
6700	0.458	12.5	3.260	-39.4	0.062	-85.7	0.506	-109.8
6800	0.445	2.9	3.290	-51.6	0.066	-95.6	0.465	-119.5
6900	0.420	-8.4	3.329	-64.4	0.071	-105.0	0.429	-130.8
7000	0.377	-21.9	3.368	-77.8	0.077	-115.1	0.391	-144.3
7100	0.342	-30.9	3.397	-84.4	0.079	-119.2	0.371	-152.3
7200	0.278	-52.6	3.407	-99.3	0.083	-130.0	0.347	-170.4
7300	0.220	-85.7	3.368	-115.1	0.086	-141.4	0.338	169.0
7400	0.207	-133.5	3.263	-131.9	0.087	-153.0	0.348	147.4

■ Package Outline
Case Style : IB

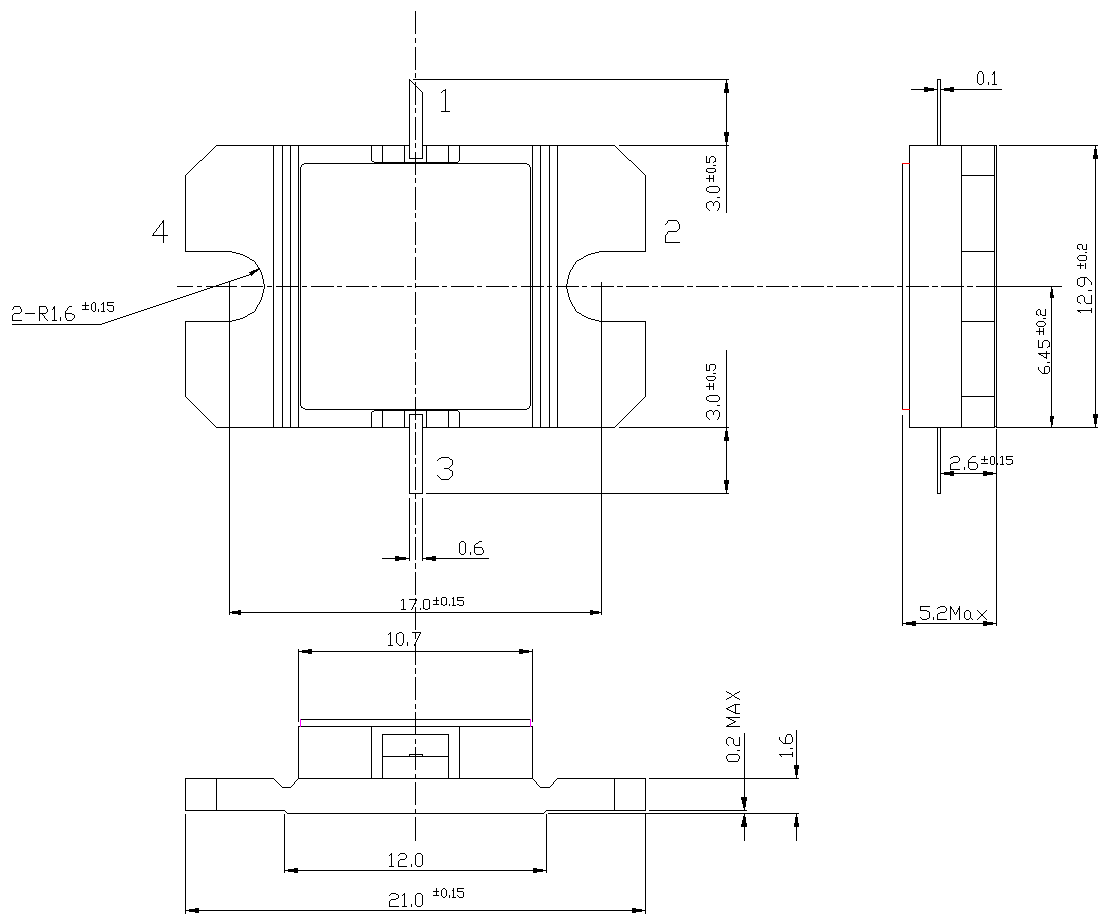

Pin Assignment

- 1 : Gate
- 2 : Source
- 3 : Drain
- 4 : Source

Unit : mm



FLM6472-4F

C-Band Internally Matched FET

For further information please contact:

<http://global-sei.com/Electro-optic/about/office.html>

CAUTION

This product contains **gallium arsenide (GaAs)** which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- Do not put these products into the mouth.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.