

# ELM7179-7PS


## C-Band Internally Matched FET

### ● FEATURES

High Output Power: P1dB=39.0dBm (Typ.)  
 High Gain: G1dB=10.0dB (Typ.)  
 High PAE:  $\eta_{add}$ =34% (Typ.)  
 Broad Band: 7.1~7.9GHz  
 Internally matched  
 Plastic Package for SMT applications

### ● DESCRIPTION

The ELM7179-7PS is a power GaAs FET that is internally matched for standard communication bands to provide optimum power and gain.

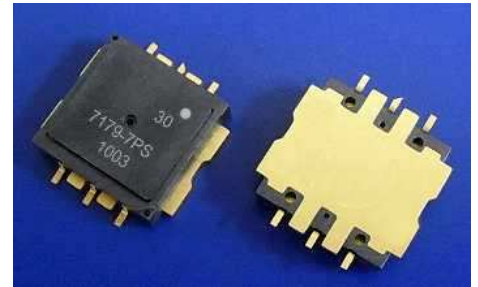

### ABSOLUTE MAXIMUM RATING (Case Temperature Tc=25 deg-C)

Item	Symbol	Rating	Unit
Drain-Source Voltage	$V_{DS}$	15	V
Gate-Source Voltage	$V_{GS}$	-5	V
Total Power Dissipation	$P_T$	42.8	W
Storage Temperature	$T_{STG}$	-40 to +125	deg-C
Channel Temperature	$T_{CH}$	175	deg-C


### RECOMMENDED OPERATING CONDITION (Case Temperature Tc=25 deg-C)

Item	Symbol	Condition	Limit	Unit
DC Input Voltage	$V_{DS}$		<10	V
Forward Gate Current	$I_{GF}$	$R_G=100$ ohm	<+16	mA
Reverse Gate Current	$I_{GR}$	$R_G=100$ ohm	>-2.2	mA
Channel Temperature	$T_{CH}$		155	deg-C

### ELECTRICAL CHARACTERISTICS (Case Temperature Tc=25 deg-C)

Item	Symbol	Condition	Limit			Unit
			Min.	Typ.	Max.	
Drain Current	$I_{DSS}$	$V_{DS}=5V, V_{GS}=0V$	-	3400	5200	mA
Trans conductance	$gm$	$V_{DS}=5V, I_{DS}=2200mA$	-	3400	-	mS
Pinch-off Voltage	$V_P$	$V_{DS}=5V, I_{DS}=170mA$	-0.5	-1.5	-3.0	V
Gate-Source Breakdown Voltage	$V_{GSO}$	$I_{GS}=170uA$	-5.0	-	-	V
Output Power at 1dB G.C.P.	$P_{1dB}$	$V_{DS}=10V$ $I_{DS(DC)}=2200mA$ (typ.) $f=7.1\sim 7.9$ GHz	38.0	39.0	-	dBm
Power Gain at 1dB G.C.P.	$G_{1dB}$		8.5	10.0	-	dB
Drain Current	$I_{dsr}$		-	2200	2600	mA
Power Added Efficiency	$\eta_{add}$		-	34	-	%
Gain Flatness	$\Delta G$		-	-	1.2	dB
3rd Order Inter Modulation Distortion	$IM_3$	$f=7.9GHz$ $\Delta f=10MHz, 2\text{-tone Test}$ $P_{out}=28.0dBm$ (S.C.L)	-40	-43	-	dBc
$R_{th}$	$R_{th}$	Channel to Case	-	2.5	3.0	Deg-C/W
$\Delta T_{ch}$	$\Delta T_{ch}$	$10V \times I_{dsr} \times R_{th}$	-	-	80	Deg-C



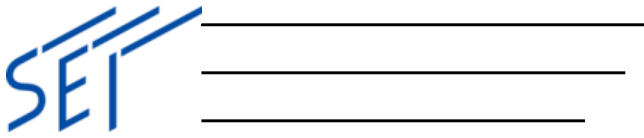

# ELM7179-7PS

## C-Band Internally Matched FET

### CASE STYLE: I2C

ESD	Class 3 A	4000-8000V
MSL	2A	4 weeks after open the package

### Ordering Information

Model Type	MOQ	MOU	Packing Style
ELM7179-7PS	15pcs	15pcs	15pcs Tray
ELM7179-7PST	500pcs	500pcs	24mm width Tape (500pcs/Reel)

\*MOQ stands for Minimum Order Quantity.

\*MOU stands for Minimum Order Unit size.

### Note


- This device will not be delivered with test data but tested pass/fail 100% against DC and RF specifications.
- NO liquid cleaning process is suitable for this device. (including de-ionized water or solvent)

# ELM7179-7PS


## C-Band Internally Matched FET

- RF Characteristics


**Power Derating Curve**

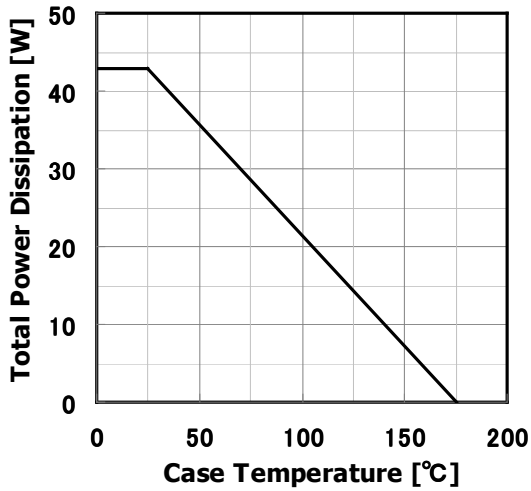

**Input Power vs. Output Power, Power Added Efficiency**  
 $V_{DS}=10V, I_{DS(DC)}=2200mA$

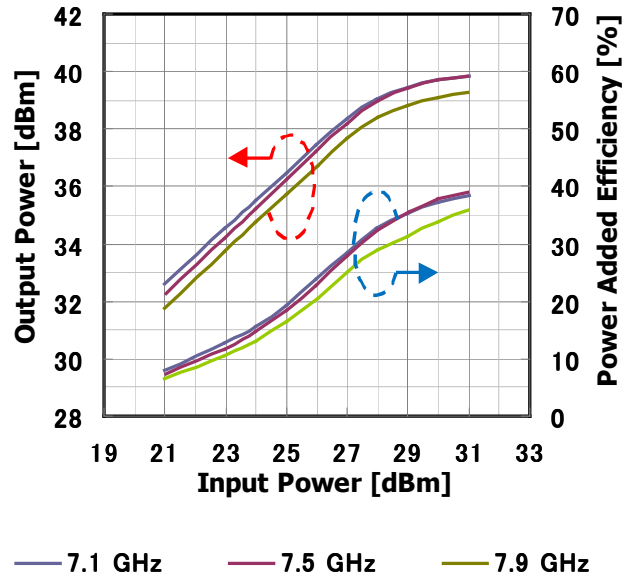


**Output Power vs. Frequency**  
 $V_{DS}=10V, I_{DS(DC)}=2200mA$

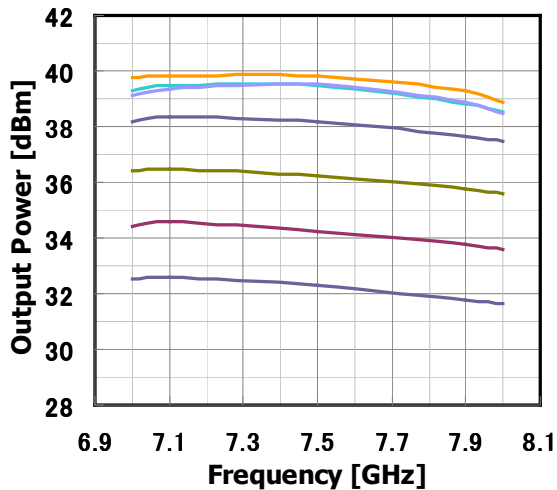

— 21 dBm — 23 dBm — 25 dBm — 27 dBm  
 — 29 dBm — 31 dBm — P1dB

**IMD vs. Output Power**  
 $V_{DS}=10V, I_{DS(DC)}=2200mA$

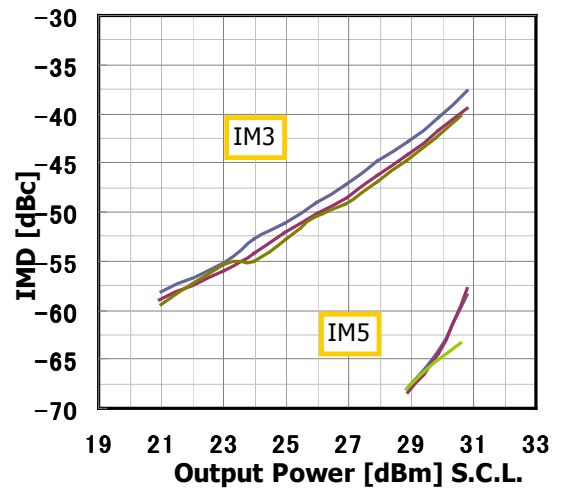


— 7.1 GHz — 7.5 GHz — 7.9 GHz




# ELM7179-7PS

## C-Band Internally Matched FET


**Input Power vs. Output Power, Power Added Efficiency by Drain Voltage**  
 $I_{DS(DC)} = 2200\text{mA}$  @7.1GHz

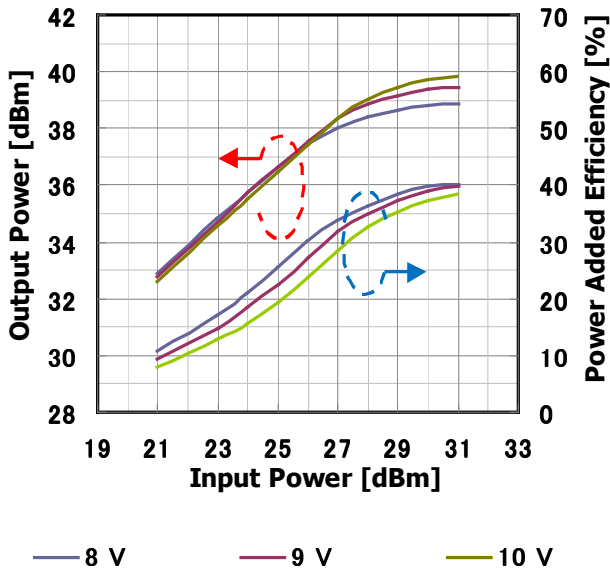

**Input Power vs. Output Power, Power Added Efficiency by Drain Voltage**  
 $I_{DS(DC)} = 2200\text{mA}$  @7.5GHz

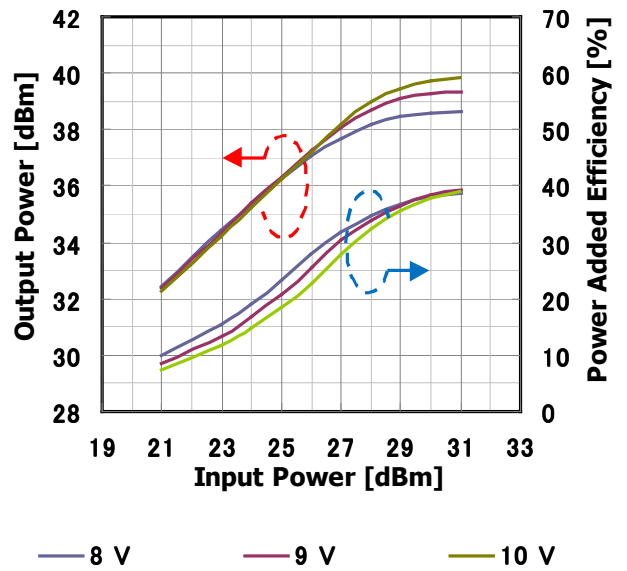


**Input Power vs. Output Power, Power Added Efficiency by Drain Voltage**  
 $I_{DS(DC)} = 2200\text{mA}$  @7.9GHz

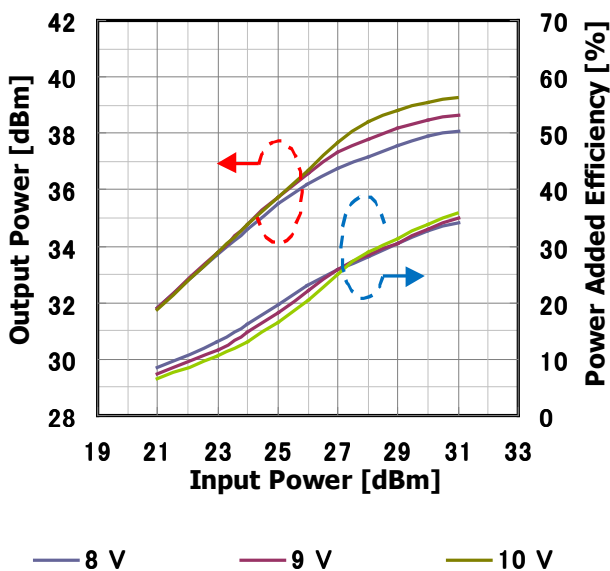


# ELM7179-7PS

## C-Band Internally Matched FET


**Input Power vs. Output Power, Power Added Efficiency by Quiescent Drain Current**  
 $V_{DS}=10V$  @7.1GHz

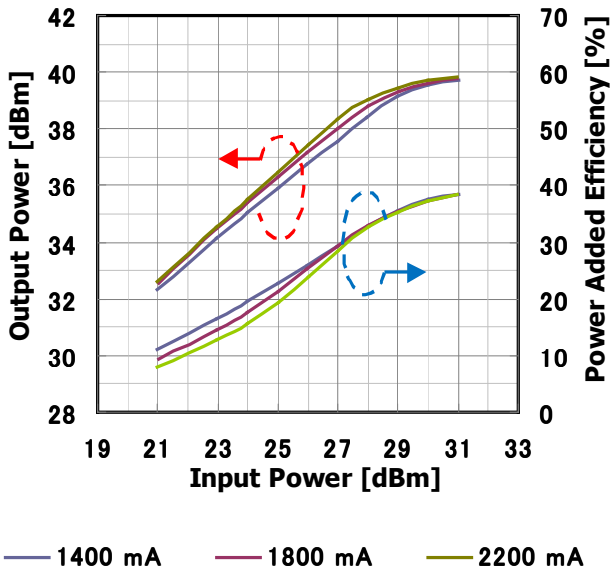

**Input Power vs. Output Power, Power Added Efficiency by Quiescent Drain Current**  
 $V_{DS}=10V$  @7.5GHz

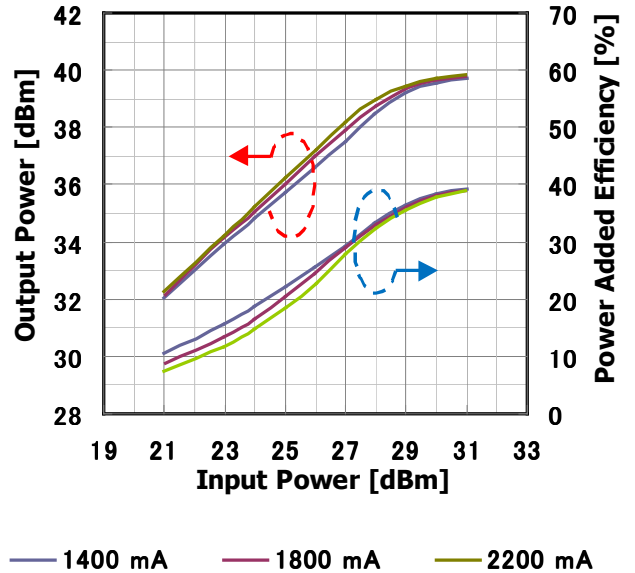


**Input Power vs. Output Power, Power Added Efficiency by Quiescent Drain Current**  
 $V_{DS}=10V$  @7.9GHz

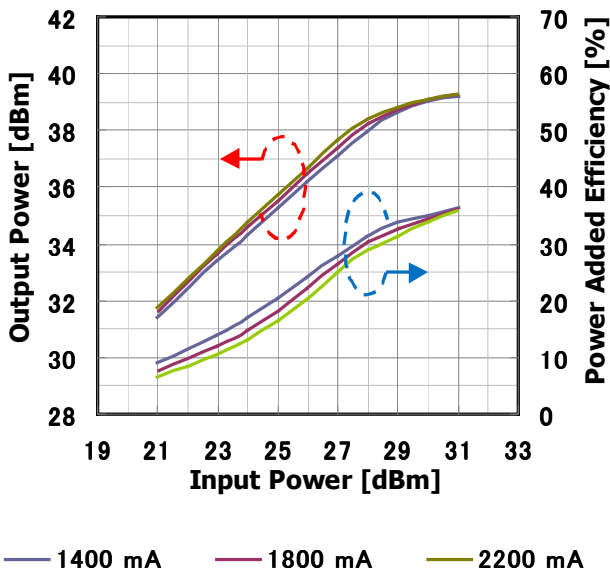


# ELM7179-7PS

## C-Band Internally Matched FET


**Input Power vs. Output Power, Power Added Efficiency by Temperature**  
 $V_{DS}=10V$   $I_{DS(DC)}=2200mA$  @7.1GHz

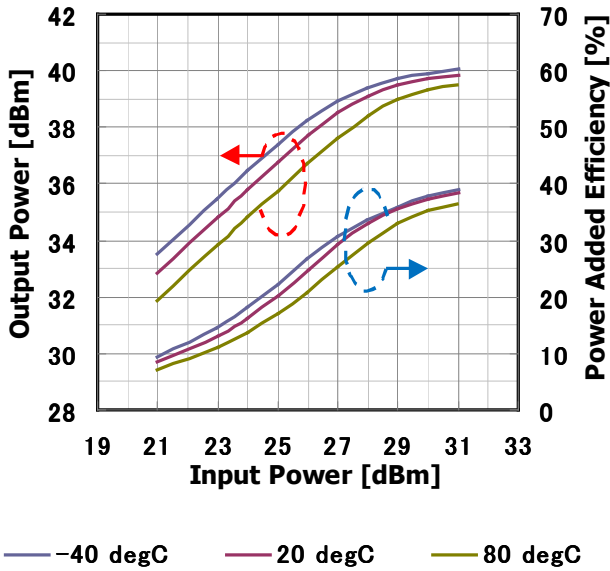

**Input Power vs. Output Power, Power Added Efficiency by Temperature**  
 $V_{DS}=10V$   $I_{DS(DC)}=2200mA$  @7.5GHz

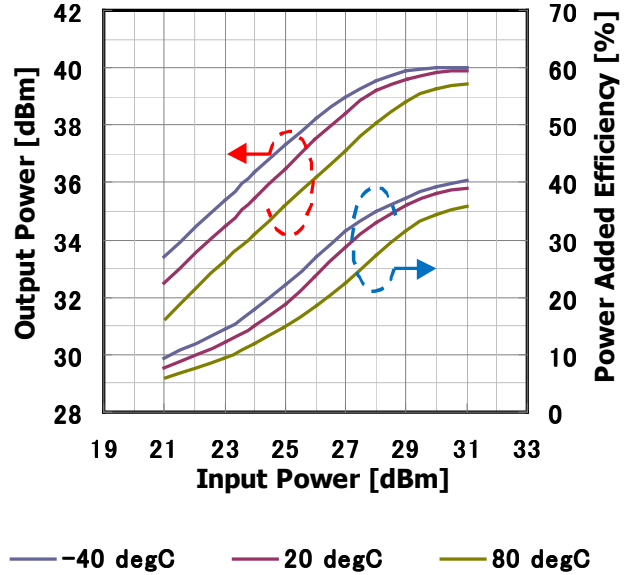


**Input Power vs. Output Power, Power Added Efficiency by Temperature**  
 $V_{DS}=10V$   $I_{DS(DC)}=2200mA$  @7.9GHz

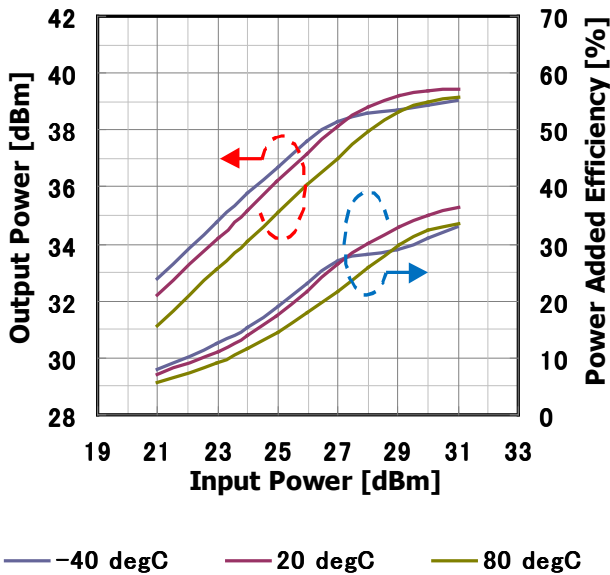

# ELM7179-7PS


## C-Band Internally Matched FET

**IMD Performance vs. Output Power by Drain Voltage**  
 $I_{DS(DC)} = 2200\text{mA} @ 7.1\text{GHz}$

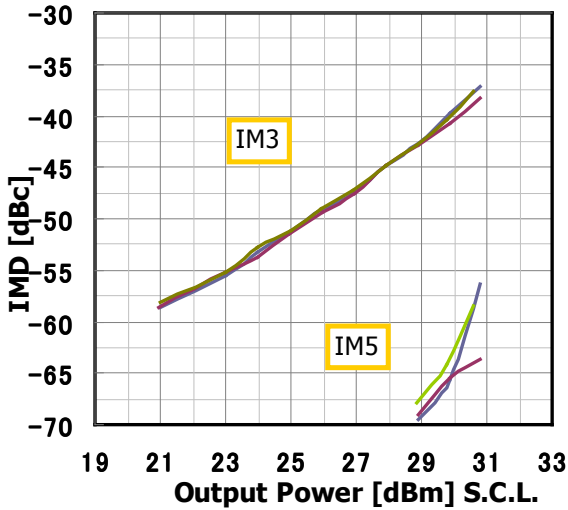


— 8 V    — 9 V    — 10 V

**IMD Performance vs. Output Power by Drain Voltage**  
 $I_{DS(DC)} = 2200\text{mA} @ 7.5\text{GHz}$

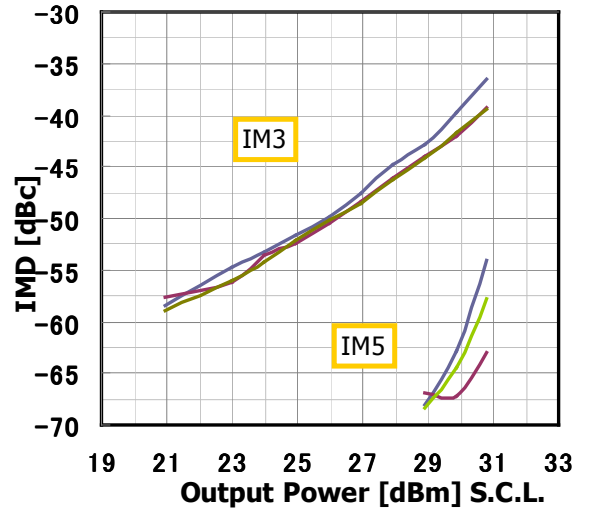

— 8 V    — 9 V    — 10 V

**IMD Performance vs. Output Power by Drain Voltage**  
 $I_{DS(DC)} = 2200\text{mA} @ 7.9\text{GHz}$

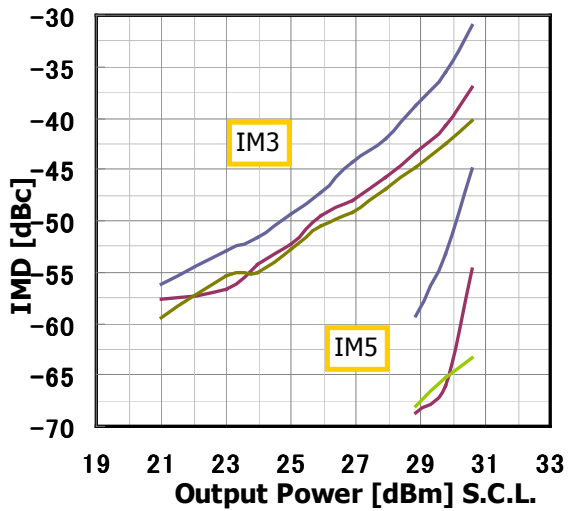


— 8 V    — 9 V    — 10 V



# ELM7179-7PS


## C-Band Internally Matched FET

**IMD Performance vs. Output Power by Quiescent Drain Current**  
 $V_{DS}=10V$  @7.1GHz

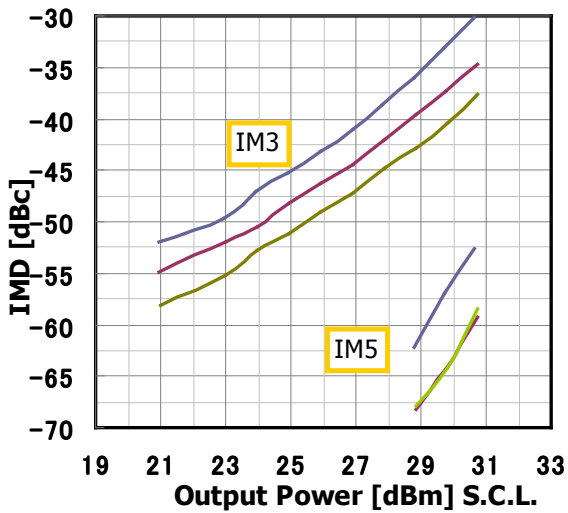


— 1400 mA — 1800 mA — 2200 mA

**IMD Performance vs. Output Power by Quiescent Drain Current**  
 $V_{DS}=10V$  @7.5GHz

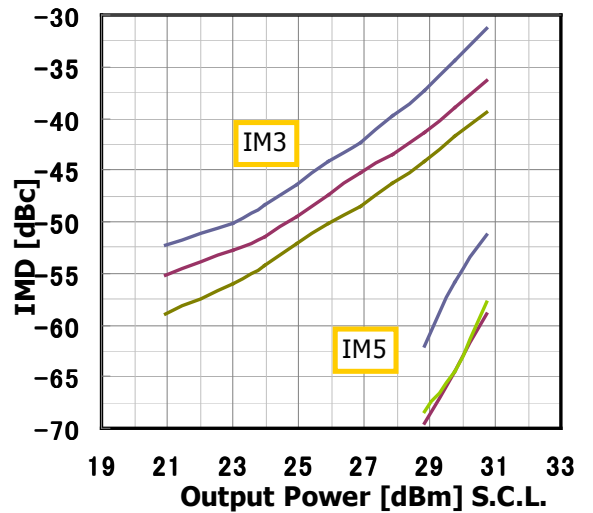

— 1400 mA — 1800 mA — 2200 mA

**IMD Performance vs. Output Power by Quiescent Drain Current**  
 $V_{DS}=10V$  @7.9GHz

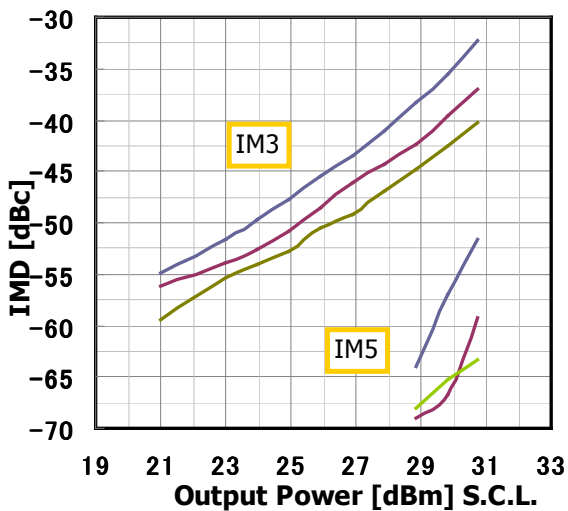

— 1400 mA — 1800 mA — 2200 mA






# ELM7179-7PS

## C-Band Internally Matched FET

**IMD Performance vs. Output Power by Temperature**


$V_{DS}=10V$   $I_{DS(DC)}=2200mA$  @7.1GHz

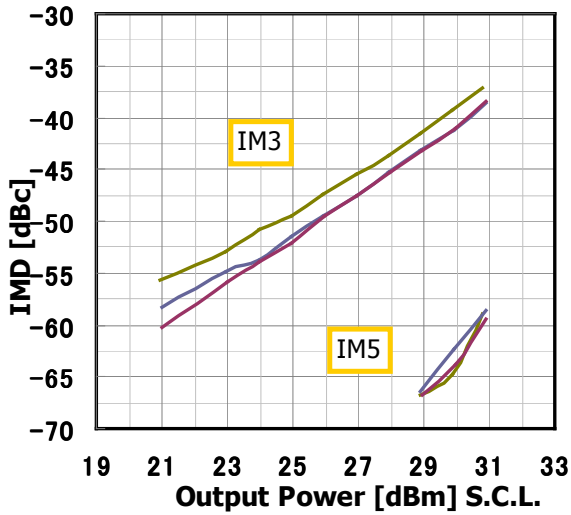

— -40 degC — 20 degC — 80 degC

**IMD Performance vs. Output Power by Temperature**


$V_{DS}=10V$   $I_{DS(DC)}=2200mA$  @7.5GHz

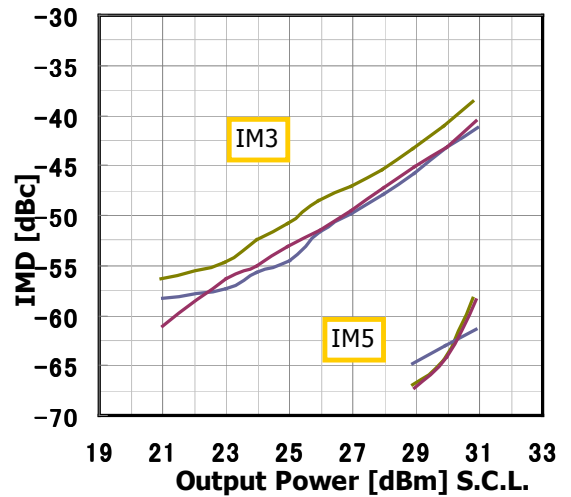

— -40 degC — 20 degC — 80 degC

**IMD Performance vs. Output Power by Temperature**

$V_{DS}=10V$   $I_{DS(DC)}=2200mA$  @7.9GHz

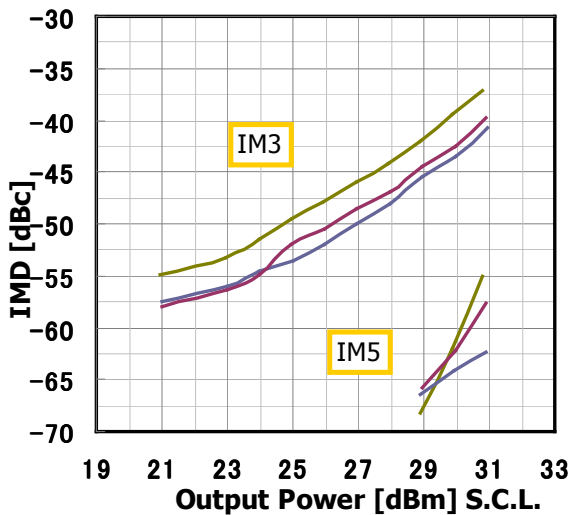



— -40 degC — 20 degC — 80 degC




# ELM7179-7PS

## C-Band Internally Matched FET

- S-Parameter**

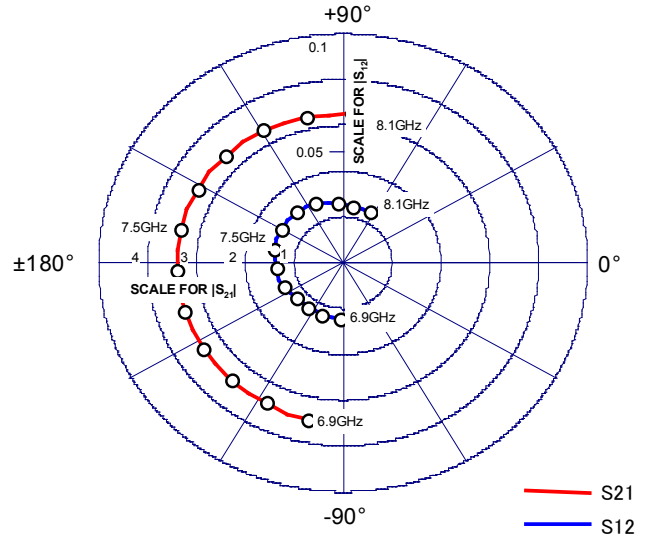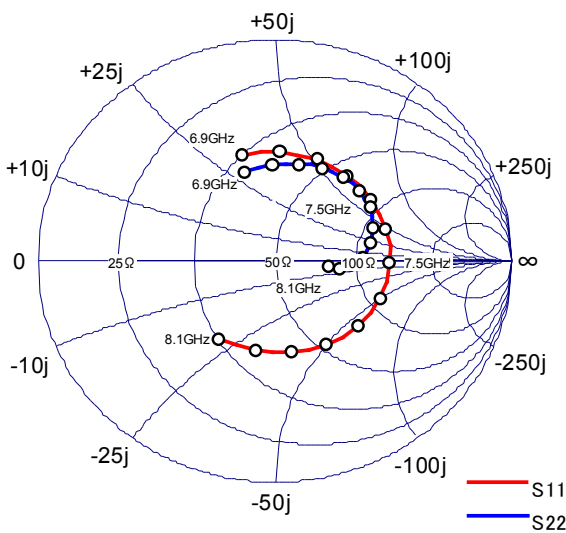




Frequency (MHz)	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
6900	0.502	106.0	3.514	-101.5	0.025	-92.4	0.421	107.4
7000	0.492	87.4	3.439	-116.9	0.024	-110.7	0.434	91.2
7100	0.490	69.2	3.426	-131.7	0.024	-126.9	0.446	77.5
7200	0.491	51.9	3.433	-146.6	0.024	-141.2	0.464	65.0
7300	0.492	34.5	3.414	-161.7	0.026	-156.7	0.475	52.7
7400	0.489	16.6	3.397	-177.0	0.028	-174.6	0.474	42.0
7500	0.485	-1.4	3.406	167.6	0.029	167.9	0.466	31.2
7600	0.473	-20.3	3.380	151.8	0.029	149.5	0.439	20.2
7700	0.456	-40.0	3.353	135.7	0.029	130.2	0.410	11.5
7800	0.438	-60.1	3.312	119.7	0.028	112.6	0.371	2.8
7900	0.421	-80.9	3.276	103.3	0.026	94.4	0.319	-3.0
8000	0.410	-101.4	3.251	86.8	0.025	79.5	0.274	-6.5
8100	0.423	-124.2	3.203	68.8	0.025	63.6	0.221	-6.8

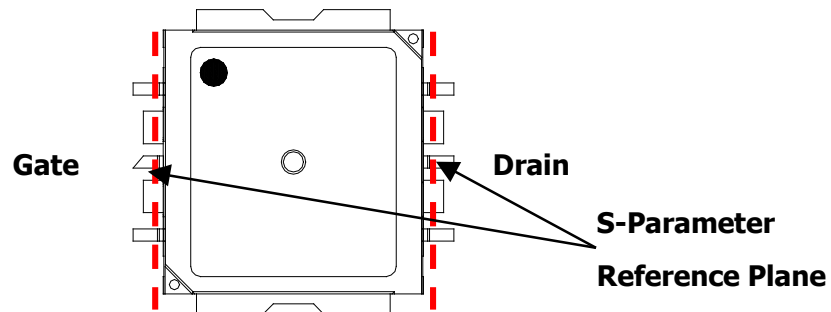

# ELM7179-7PS

## C-Band Internally Matched FET


● Package Out Line

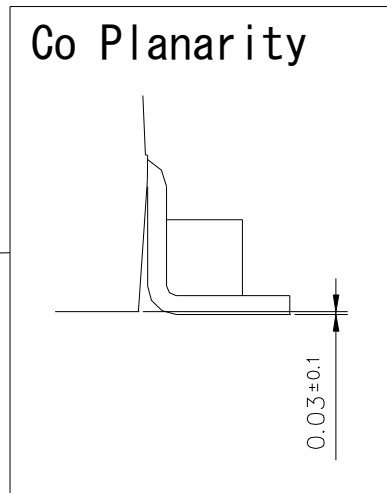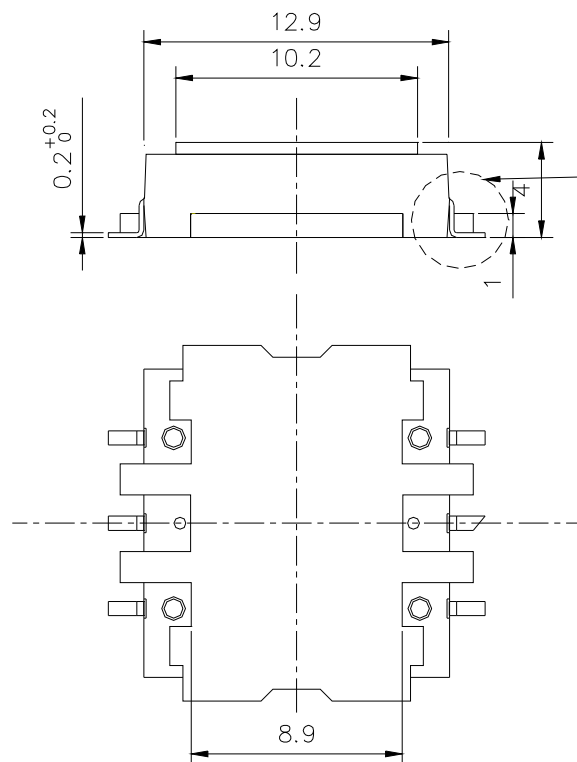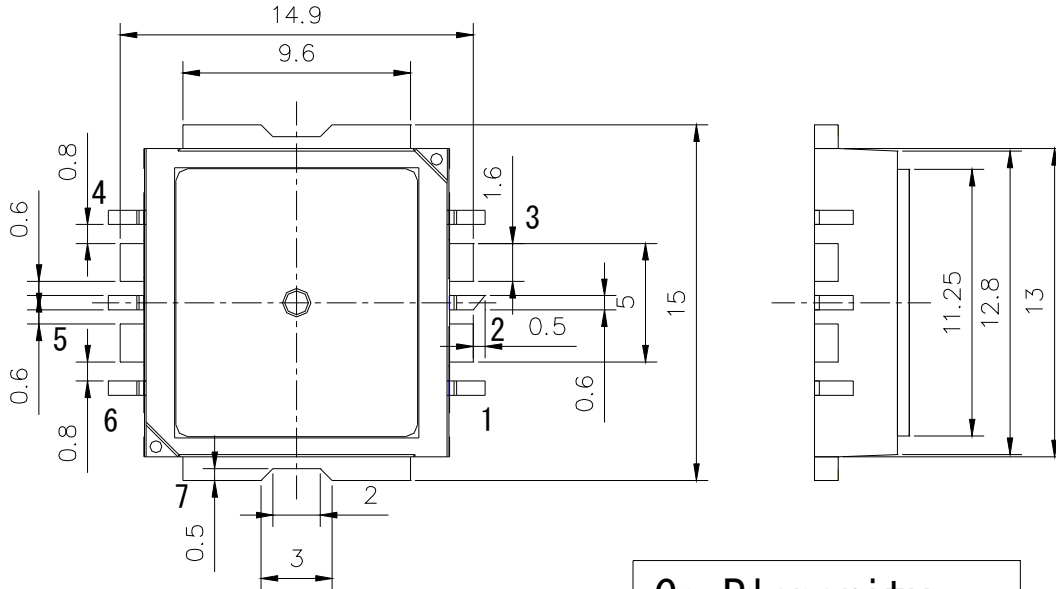


Pin Assignments

1	: NC
2	: Gate
3	: NC
4	: NC
5	: Drain
6	: NC
7	: Source

- PCB Pads and Solder-Resist Pattern

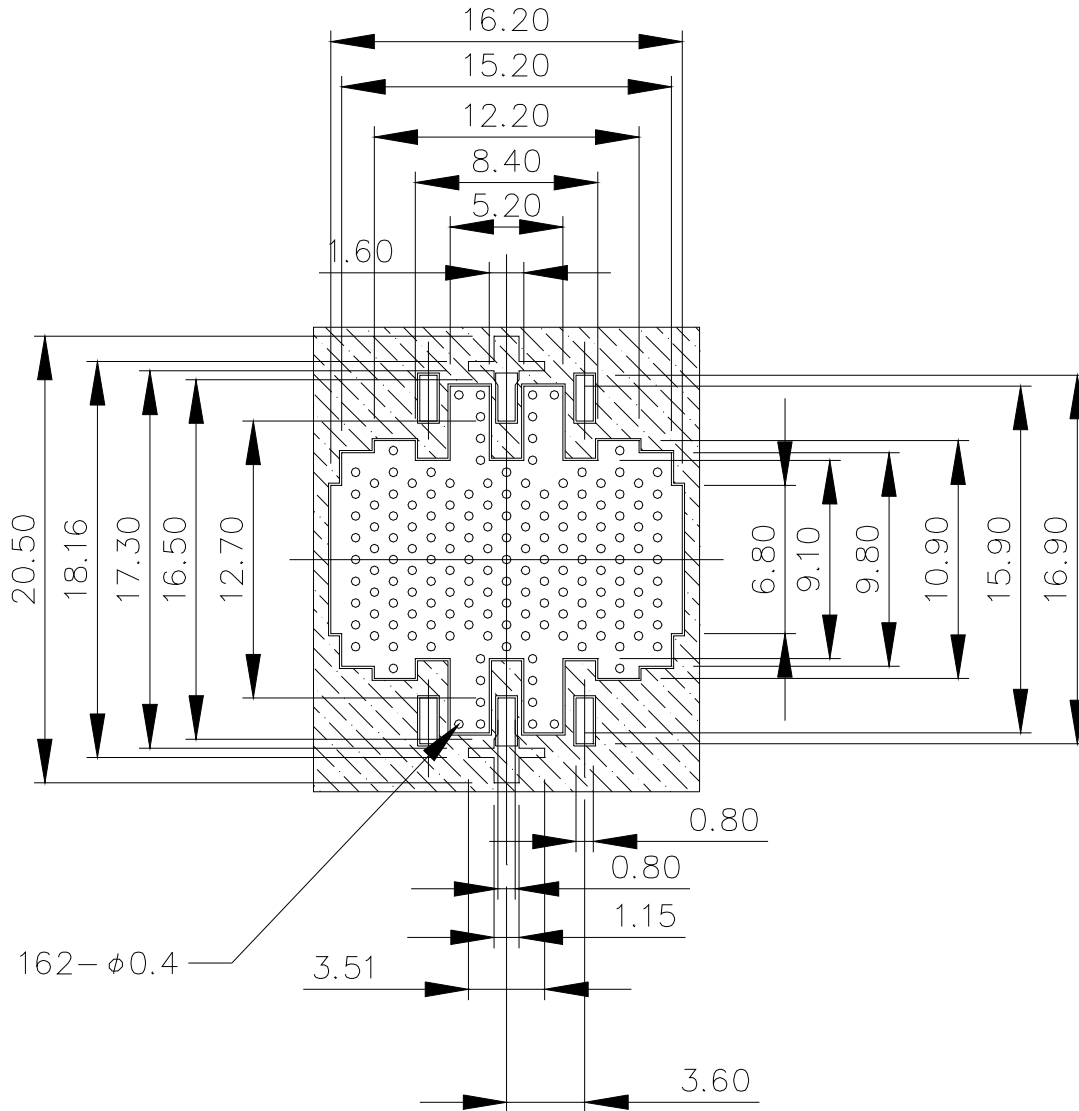



Notes :

1. Laminate : Rogers Corporation R04003, Thickness  $t=0.508\text{mm}$ , Cu Foil  $18\mu\text{m}$ .  
Finish to copper foil : Ni  $0.1\mu\text{m}$  min. / Au  $0.1\mu\text{m}$  (Both side).
2.  : Resist

# ELM7179-7PS

## C-Band Internally Matched FET

- **Marking and Tape/Reel Configuration**

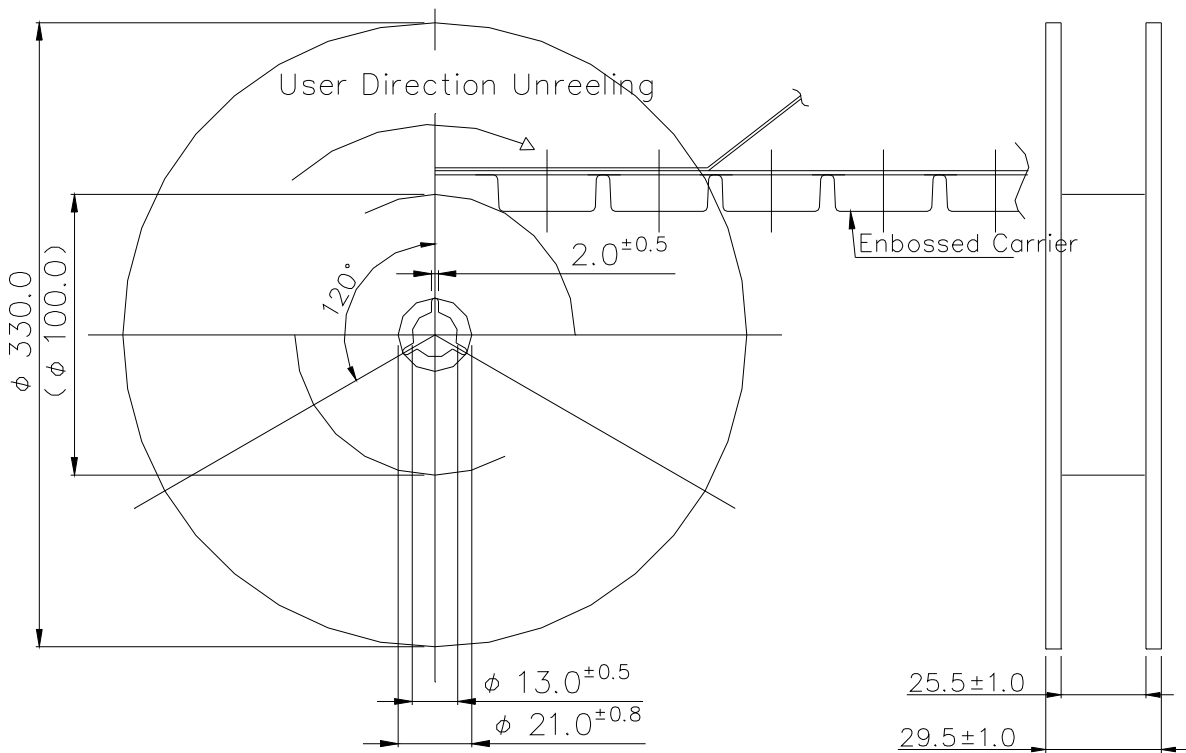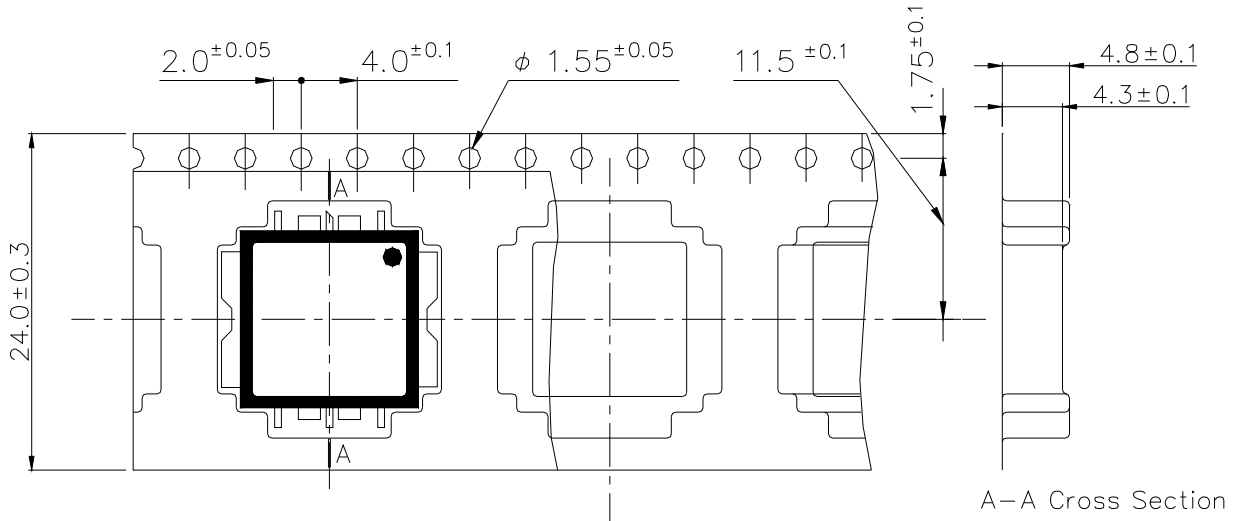

Quantity: 500pcs/tape  
Tape Material: Conductive PS

(unit in mm)

- **Mounting Instructions for Package for Lead-free solder**

### Mounting Condition

For soldering, Lead-free solder (Sn-3.0Ag-0.5Cu)\*1 which is no liquid cleaning type shall be used.

1. The example solder is a tin-rich alloy with 3.0% silver and 0.5% copper, often called Sn 96 for its approximate Tin content.
2. A rosin type flux with chlorine content of 0.2% or less shall be used. The rosin flux with low halogen content is recommended. When soldering, use the following time/ temperature profile with any of the methods listed for acceptable solder joints.
3. Make sure the devices have been properly prepared with flux prior soldering.


### \*Reflow soldering method (Infrared reflow / Heat circulation reflow / Hot plate reflow);

Limit solder to 3 reflow cycles because resin is used in the modules manufacturing process.

Excessive reflow will effect the resin resulting in a potential failure or latent defect.

The recommended reflow temperature profile is shown below. The temperature of the reflow profile must be measured at the device lead.

- **Reflow temperature profile and condition:**

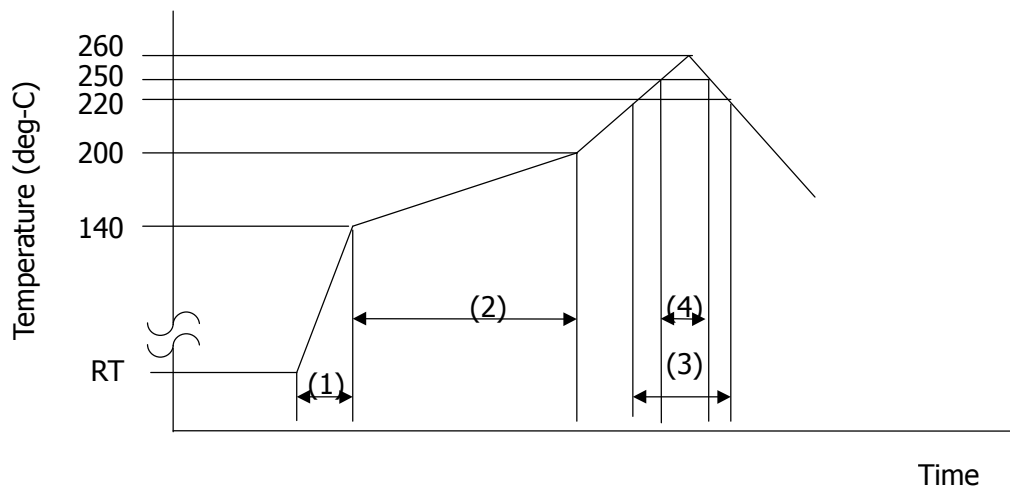

- (1). Temperature rise: 3 deg-C/seconds.
- (2). Preheating: 150 – 200 deg-C, 60 - 180seconds.
- (3). Main heating: 220 deg-C, 60 seconds max.
- (4). Main heating: 260 deg-C max., more than 250 deg-C, 20 - 40 seconds max.

\* Measurement point: Device Heat-sink (Source Pin).

1. The above-recommended conditions were confirmed using the manufacturer’s equipment and materials. However, when soldering these products, the soldering condition should be verified by customer using their own particular equipment and materials.

- **Cleaning**

Avoid washing of the device after soldering by reflow method due to the risk of liquid absorption by the resin used in this part.



### Humidity Lifetime for ELMxxxx-7PST

The following graph shows the effect of moisture on lifetime (moisture resistance) for the **ELMxxxx-7PST**. Each graph indicates the MTTF and failure rate prediction (Confidential Level = 90 %) which calculated from the results of highly accelerated temperature and humidity stress test (HAST).



Representative of device type : ELM7179-7PST


Subject of device type : ELMxxxx-7PST

### Field environmental conditions for operation

If the **ELMxxxx-7PST** is installed in a non-hermetic environment, please refer to the following recommendations and notes for design with, and assembly and use of our products.

- Note 1. When drain current cuts off, it should be cut off by drain bias, and not cut off by gate bias only. The humidity lifetime becomes shorter in case of the gate-only cut off operation due to electric field strength interacting with humidity.
- Note 2. **ELMxxxx-7PST** should be used under the environment conditions of no dew condensation. These plots do not apply in the case of liquid absorbed into the resin, whether applied to the part in assembly or as condensate in the application.

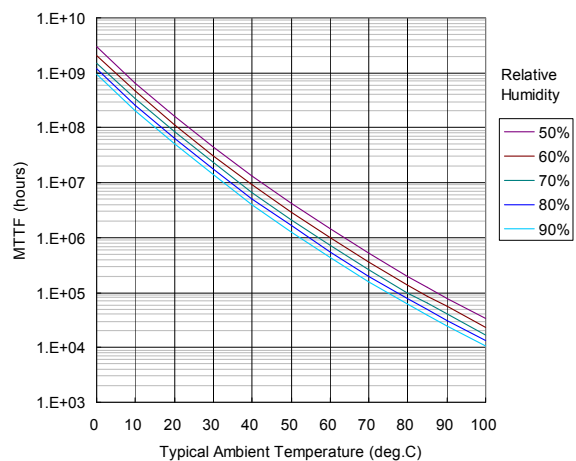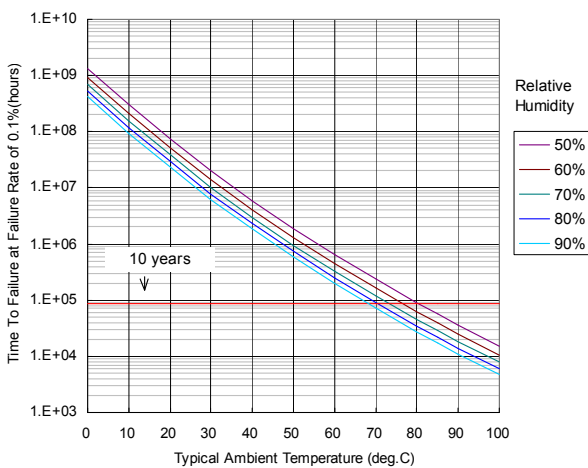

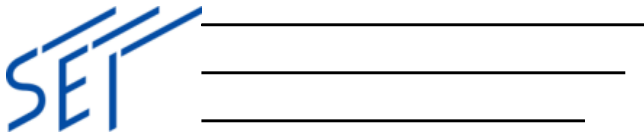

# ELM7179-7PS

## C-Band Internally Matched FET

### For further information please contact:

#### **Sumitomo Electric Device Innovations, U.S.A., Inc.**

2355 Zanker Rd.  
San Jose, CA 95131-1138, U.S.A.  
TEL: +1 408 232-9500  
FAX: +1 408 428-9111

#### **Sumitomo Electric Europe Ltd.**

220 Centennial Park Elstree  
WD6 3SL United Kingdom  
TEL: +44 (0)20 8953-8118  
FAX: +44 (0)20 8953-8228

#### **Sumitomo Electric Europe Ltd. (Italy Branch)**

Piazza Don E. Maelli, 60-20099  
Sesto San Giovanni, Milano, Italy  
TEL: +39-02-496386-01  
FAX: +39-02-496386-25

#### **Sumitomo Electric Asia, Ltd.**

Room 2624-2637, 26/F,  
Sun Hung Kai Centre,  
30 Harbour Road, Wanchai, Hong Kong  
TEL: +852-2576-0080  
FAX: +852-2576-6412

#### **Sumitomo Electric Device Innovations, Inc.**

1000 Kamisukiahara, showa-cho  
Nakakomagun, Yamanashi  
409-3883, Japan  
(Kokubo Industrial Park)  
TEL +81-55-275-4411  
FAX +81-55-275-9461

#### **Sumitomo Electric Industries, Ltd. Head Office (Tokyo)**

3-9-1, Shibaura, Minato-ku, Tokyo 108-  
8539, Japan  
TEL +81-3-6722-3283  
FAX +81-3-6722-3284

#### **CAUTION**

- Sumitomo Electric Device Innovations, Inc. products contain gallium arsenide (GaAs) which can be hazardous to the human body and the environment. For safety, observe the following procedures:
- Do not put these products into the mouth.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.

Sumitomo Electric Device Innovations, Inc. reserves the right to change products and Specifications without notice. The information does not convey any license under rights of Sumitomo Electric Device Innovations, Inc. or others.

© 2010 Sumitomo Electric Device Innovations, Inc.